

Type: MXPRC/S/F

Phase Failure, Phase Sequence, Under and Over Voltage plus Time Delay


- ☐ 17.5mm DIN rail housing
- ☐ True R.M.S.
- ☐ Microprocessor based (self checking)
- ☐ Monitors own supply and detects if one or more phases exceed the fixed Under or Over Voltage trip levels
- ☐ Measures phase to phase voltages
- ☐ Detects incorrect phase sequence and phase loss
- ☐ Fixed under and over voltage trip levels (-10% 400V/+10% of 415V)
- ☐ Adjustment for time delay (from under or over voltage condition)
- ☐ 1 x SPDT relay output 8A
- ☐ Intelligent LED indication for troubleshooting supply and relay status



Dims:
to DIN 43880
W. 17.5mm

Terminal Protection to IP20

FUNCTION DIAGRAM

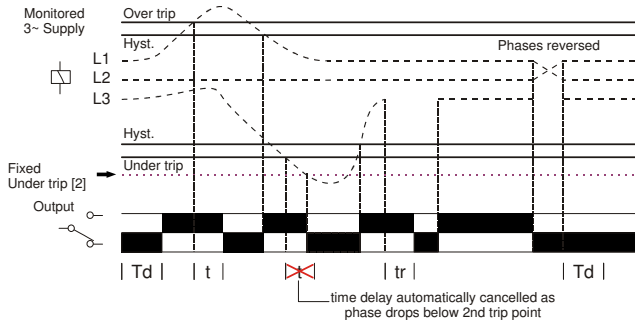

INSTALLATION AND SETTING

Installation work must be carried out by qualified personnel.

- BEFORE INSTALLATION, ISOLATE THE SUPPLY.
- Connect the unit as required. The Connection Diagram below shows a typical installation, whereby the supply to a load is being monitored by the Phase monitoring relay. If a fault should occur (i.e. fuse blowing), the relay will de-energise and assuming control of the external Contactor, de-energise the Contactor as well.

Applying power.

- Set the "Delay (t)" to minimum.
- Apply power and the green "Power supply" and red "Relay" LED's will illuminate, the relay will energise and contacts 15 and 18 will close. Refer to the troubleshooting table if the unit fails to operate correctly.

Setting the unit.


- Set the "Delay (t)" adjustment as required. (Note that the delay is only effective should the supply increase above or drop below the fixed trip levels. However, if during an under voltage condition the supply drops below the 2nd under voltage trip level, any set time delay is automatically cancelled and the relay de-energises).
Note: If the supply voltage increases above the Over trip level by approx. 20% or more, the relay will de-energise immediately.

Troubleshooting.


The table below shows the status of the unit during a fault condition.

Supply fault	Green LED	Red LED	Relay
Phase missing	On	Off	De-energised
Phases reversed i.e. L1, L3, L2 (no delay)		Off	De-energised
Under Voltage condition (during timing)	On	Flashing	Energised for set delay (t)
Under Voltage condition (after timing)		Off	De-energised
Over Voltage condition (during timing)	On	Flashing	Energised for set delay (t)
Over Voltage condition (after timing)		Off	De-energised
Phase below 70% of Un (fixed under trip level [2])	On	Off	De-energised

CONNECTION DIAGRAM

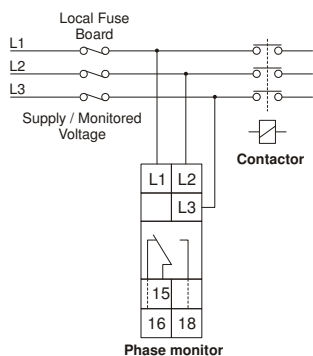

SETTINGS

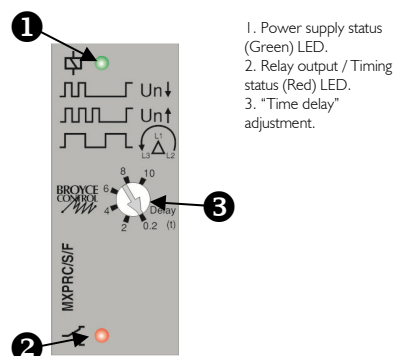

TECHNICAL SPECIFICATION

Supply / monitoring voltage Un* (L1, L2, L3):	415V AC
Frequency range:	48 - 63Hz
Supply variation:	70 - 120% of Un
Isolation:	Over voltage cat. III
Rated impulse withstand voltage:	4kV (1.2 / 50µs) IEC 60664
Power consumption:	8VA max.
Fixed trip levels:	
Over:	457V (+10% of 415V)
Under:	360V (-10% of 400V)
Under [2]:	291V
Trip accuracy:	± 1%
Hysteresis:	≈ 1% of trip level (factory set)
Repeat accuracy:	± 0.5% @ constant conditions
Immunity from micro power cuts:	< 50mS
Response time:	≈ 50mS
Time delay (t):	0.2 - 10 sec (± 5%) Note: actual delay (t) = adjustable delay + response time
Delay from phase loss (tr):	≈ 150mS (worst case = tr x 2)
Power on delay (Td):	≈ 1sec. (worst case = Td x 2)
Ambient temp:	-20 to +60°C
Relative humidity:	+95%
Output (15, 16, 18):	SPDT relay
Output rating:	AC1 250V 8A (2000VA) AC15 250V 5A (no), 3A (nc) DC1 25V 8A (200W)
Electrical life:	≥ 150,000 ops at rated load
Dielectric voltage:	2kV AC (rms) IEC 60947-1
Rated impulse withstand voltage:	4kV (1.2 / 50µs) IEC 60664
Housing:	Orange flame retardant UL94 VO
Weight:	≈ 70g
Mounting option:	On to 35mm symmetric DIN rail to BS5584:1978 (EN50 002, DIN 46277-3) Or direct surface mounting via 2 x M3.5 or 4BA screws using the black clips provided on the rear of the unit.
Terminal conductor size:	≤ 2 x 2.5mm ² solid or stranded

Approvals:



Conforms to IEC, CE and RoHS Compliant.

EMC:
Immunity: EN/IEC 61000-6-2 (EN/IEC 61000-4-3 15V/m 80MHz - 2.7GHz)
Emissions: EN/IEC 61000-6-4

Options:

1. For other Supply / monitoring voltages, please consult Sales.

MOUNTING DETAILS

