



ELR01/30PN Function Diagrams


Latching mode (factory default)

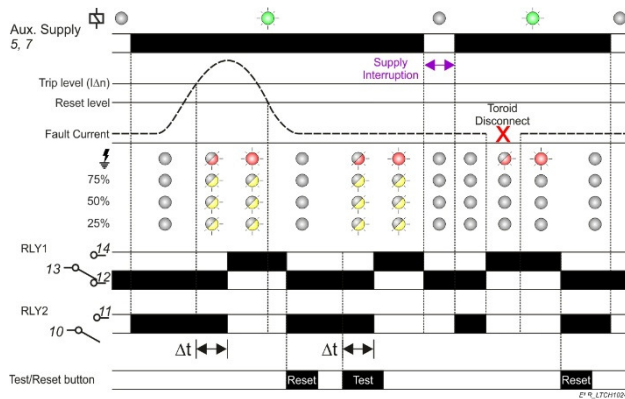


Auto-reclosure mode (enabled via app)

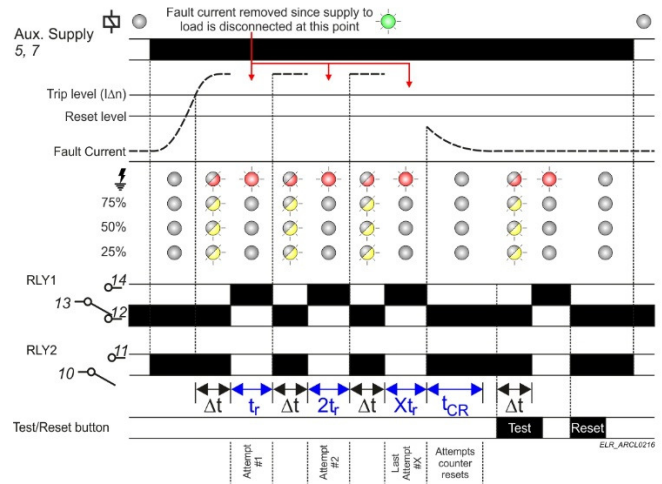

Auto-reset mode (enabled via app)

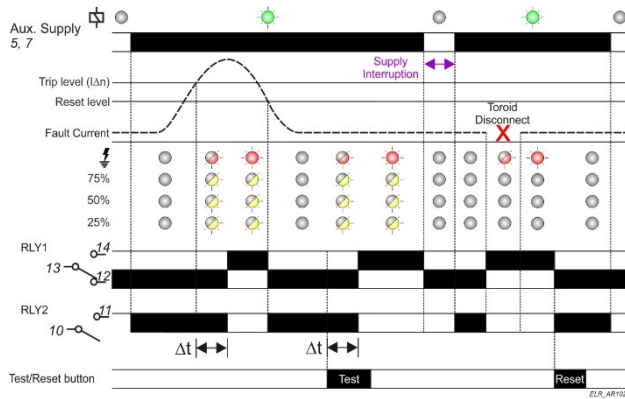

Pre-Alarm mode (enabled via app)

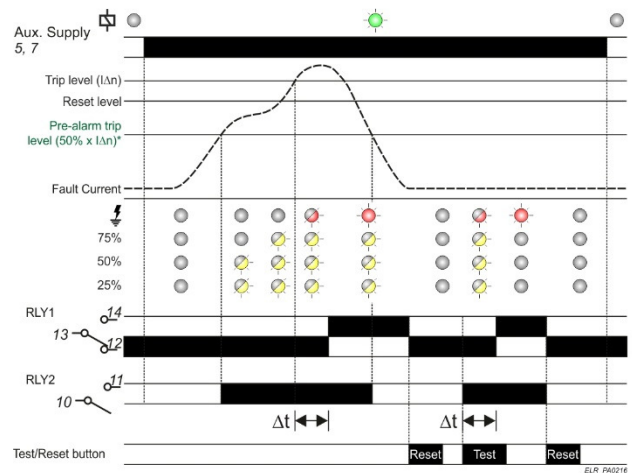

Note:

Relays are shown operating in their factory default states i.e. RLY1 = Standard Output and RLY2 = Positive Safety Output (Pre-Alarm default states are RLY1 and RLY2 = Standard Output)
UL Listed products received a software update in which it is necessary to manually reset the ELR following the disconnection, then reconnection of the external toroid.

LED legend

● Off ● On ● Flashing