

Terminal Protection to IP20



Dims: to DIN 43880
W. 17.5mm

- ❑ ***NEW* 17.5mm DIN rail housing**
- ❑ **Microprocessor based**
- ❑ **Recycling "On / Off" function AN (or "Off / On" AF when external link fitted)**
- ❑ **Separate adjustments for "on" and "off" ranges**
- ❑ **7 Selectable time ranges (0.1 seconds – 100 hours)**
- ❑ **Fine adjustment of selected time range**
- ❑ **Multi-voltage input (24 – 230V AC/12 – 230V DC)**
- ❑ **1 x DPDT relay output 8A**
- ❑ **Green LED indication for supply / timing status**
- ❑ **Red LED indication for relay status**
- ❑ **Conforms to IEC 61812**


Wiring Information and Product Demonstration
Videos can also be found on our YouTube channel

<https://www.youtube.com/user/BroyceControlLtd>




FUNCTION DIAGRAMS

Asymmetrical Recycling On / Off (AN)

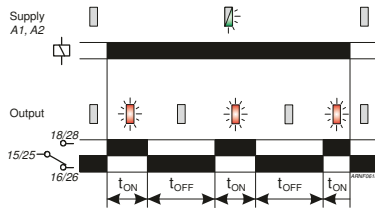

Asymmetrical Recycling Off / On (AF) (terminals A1 and B1 linked)

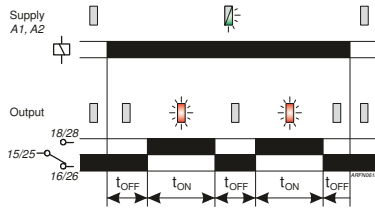

INSTALLATION AND SETTING

- BEFORE INSTALLATION, ISOLATE THE SUPPLY.
- Connect the unit as required.
- If Asymmetrical Recycling "Off / On" is required, placed a link between terminals A1 and B1.



Installation work must be carried out by qualified personnel.

Setting the unit.

- Set the "tOFF" ④ and "tON" ⑤ "Range" selectors to the required position (depending on whether seconds, minutes or hours are required).
- Set the "Set %" adjustment for the "tOFF" ③ and "tON" ⑥ as required. The "Set %" is a % of the selected range, so 60% of the 1 – 10 hour range will give 6 hours.

Applying power.

- Apply power and the green LED ① will start flashing to indicate timing is in progress.
- The red LED ② will illuminate to indicate the relay is the energised state when the "tON" delay is running.
- When the "tOFF" delay is running and relay is de-energised, the red LED will remain extinguished.

Note:

¹ In accordance with IEC 61812, the green LED is permitted to extinguish during a voltage dip or momentary interruption of the power supply providing the state of the output relay does not change. The dip / interruption duration and levels are defined in the product standard.

TECHNICAL SPECIFICATION


Supply voltage U (A1, A2):	24 – 230V AC/12 – 230V DC			
Frequency range:	48 - 63Hz (AC supplies)			
Supply variation:	AC: +15/-20%, DC: +/-15%			
Overvoltage category:	III (IEC 60664)			
Rated impulse withstand voltage:	4kV (1.2/50µS) IEC 60664			
Power consumption (max.):	12V	24V	110V	230V
	AC: 0.6VA	0.8VA	1.6VA	6.8VA
	DC: 0.52W	0.48W	0.94W	1.9W
Timing functions (2):	Asymmetrical Recycling "On / Off" (AN) Asymmetrical Recycling "Off / On" (AF) (A1 > B1 linked)			
Timing ranges (7): (applies to "tON" and "tOFF")	Seconds: 0.1 – 1 1 – 10	Minutes: 0.1 – 1 1 – 10	Hours: 0.1 – 1 1 – 10 10 - 100	
Reset time:	100ms			
Accuracy:	± 1% of maximum full scale			
Adjustment accuracy:	< 5% of maximum full scale			
Repeat accuracy:	± 0.5% at constant conditions (IEC 61812)			
Drift with temperature:	± 0.05% / °C			
Drift with voltage:	± 0.2% / V			
Power on indication / Timing ¹ :	Green LED			
Relay status	Red LED			
Ambient temp:	-20 to +60°C			
Relative humidity:	+95%			
Output (15, 16, 18, 25, 26, 28):	DPDT relay			
Output rating:			250V 8A (2000VA)	
	AC15		250V 5A (no), 3A (nc)	
	DC1		25V 8A (200W)	
Electrical life:	≥ 150,000 ops at rated load			
Dielectric voltage:	2kV AC (rms) IEC 60947-1			
Rated impulse withstand voltage:	4kV (1.2/50µs) IEC 60664			
Housing:	Grey flame retardant UL94 V0			
Weight:	≈ 70g			
Mounting option:	On to 35mm symmetric DIN rail to BS EN 60715 or direct surface mounting via 2 x M3.5 or 4BA screws using the black clips provided on the rear of the unit.			
Terminal conductor size:	≤ 2 x 2.5mm ² solid or stranded			
Terminal screw:	M3			
Tightening torque:	0.4Nm (3.5Lb-In) Max.			
Approvals:	Conforms to IEC 61812.			



IND. CONT. EQ.
E111187


CE, UKCA, C-tick and RoHS Compliant.
EMC: Immunity: EN 61000-6-2 (EN 61000-4-3 10V/m 80MHz - 2.7GHz)
Emissions: EN 61000-6-4

CONNECTION DIAGRAM



SETTING DETAILS

1. Power supply status / Timing (Green) LED
2. Relay output status (Red) LED
3. "tOFF" delay "Set %" adjustment
4. "tOFF" delay "Range" selector
5. "tON" delay "Range" selector
6. "tON" delay "Set %" adjustment



DIMENSIONS

